



PT MITRA TEHNIK SURYA PERSADA

Shop Address : Semarang - Indonesia

Telp : +62-24-76928989

Fax : +62-24-76928988

HP/WA : +62-838-7316-4226

Email : marketingmitratehniksp@gmail.com



ELECTRIC MOTOR - GEAR REDUCER - BLOWER - INDUSTRIAL PUMP - INVERTERS - HOIST



MOTRIC




TECO

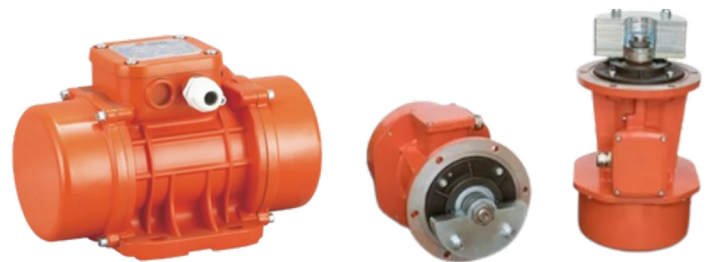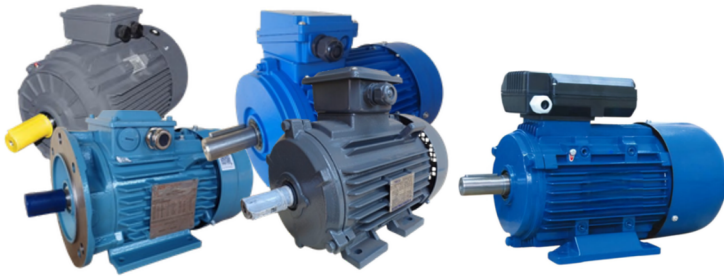

	3 Phase	1 Phase
Voltage	220/380V 380/660V	220V
Power	0.5 - 420 HP (0.37 - 315 KW)	0.12 - 25 HP (0.09 - 18.5 KW)
Mounting	B3, B5, B35, B14, B34	B3, B5
RPM	3000, 1500, 1000, 750	
Protection	IP55 ; Ins Cl. F or Ins Cl. H	

	VIBRATION MOTOR
Voltage	1 Phase (220V) 3 Phase (220/380V)
Power	0.02 - 10 kW
Vibrating Force	0.2 - 130 kN (20 - 13000 kg/F)
RPM	3000, 1500, 1000 RPM

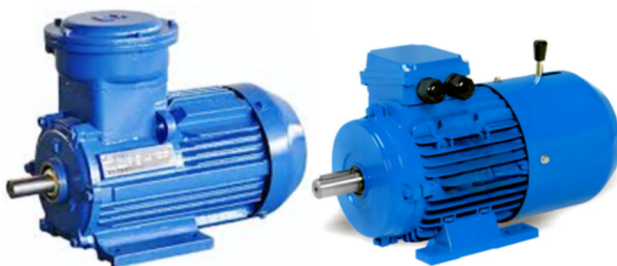

	EXPLOSION PROOF MOTOR	BRAKE MOTOR
Voltage	3 Phase (220/380V or 380/660V)	
Power	0.5 - 270 HP (0.37 - 200 KW)	0.25 - 125 HP (0.18 - 90 KW)
Mounting	B3, B5, B35	
RPM	3000, 1500, 1000, 750	
Protection	IP55 ; Ins Cl. F	

	TORQUE MOTOR
Voltage	3 Phase (220/380V)
Capacity	5 - 500 kg-cm
Mounting	Foot, Flange
Pole	4P, 6P, 8P, 12P



MHH

MHV

MMC




MK

MKAF



MFV



MP



MZQ

HELICAL GEAR REDUCER	
Torque	Up to 50.000Nm
Power	0.12 - 200 KW
Ratio	1:1.3 - 1:32.625



MCH



MCV


CYCLOIDAL REDUCER	
Torque	Up to 65.000Nm
Power	0.12 - 90 KW
Ratio	1:9 - 1:28.460

COMPACT HELICAL GEAR	
Torque	Up to 120 NM
Power	0.1 - 1.5KW
Ratio	1:5 - 1:200



MGH

MGV-L

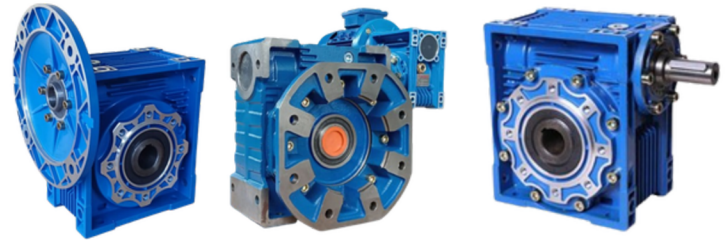

NMRV

NRV


NMRV SERIES REDUCER	
Torque	Up to 50.000Nm
Power	0.12 - 200 KW
Ratio	1:1.3 - 1:32.625

VARIATOR	
Torque	Up to 1000 Nm
Power	0.18 - 4 KW
Ratio	1:5



MSH

MINI HELICAL GEAR	
Torque	Up to 500 Nm
Power	0.1 - 1.5 KW
Ratio	1:5 - 1:200



MMH



WPA

WPS

WPDS



WPX



WPO

WP SERIES GEAR REDUCER	
Torque	Up to 3660Nm
Power	Up to 55 KW
Ratio	1:10 - 1:3600



CENTRIFUGAL PUMP	
Capacity (Max)	1100 m ³ /hour
Head (Max)	150 meter
Temp (Max)	105 °C
Shaft Sealing	Gland Packed or Mechanical Seal




HOT OIL PUMP	
Capacity (Max)	550 m ³ /hour
Head (Max)	100 meter
Temp (Max)	350 °C
Shaft Sealing	Mechanical Seal



VERTICAL MULTISTAGE PUMP	
Capacity (Max)	180 m ³ /hour
Head (Max)	305 meter
Temp (Max)	120 °C
Material	Stainless Steel 304 / 316 or Cast Iron



GEAR PUMP	
Capacity (Max)	9600 L/hour
Head (Max)	25 bar
Temp (Max)	80 °C
Shaft Sealing	Gland Packed or Mechanical Seal

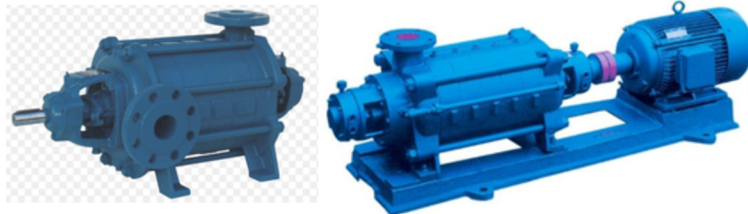

MULTISTAGE PUMP	
Capacity (Max)	550 m ³ /hour
Head (Max)	100 meter
Temp (Max)	350 °C
Shaft Sealing	Mechanical Seal



SCREW PUMP	
Capacity (Max)	208 m ³ /hour
Head (Max)	12 bar
Particle (Max)	29 mm
Rotor Material	Cast Iron / SS 304 / SS 316




	RING BLOWER	VACCUM VANE PUMP
Voltage	1 Phase (220 V) 3 Phase (220/380V)	
Power	0.22 - 20KW	0.35 - 3 KW
Airflow	Up to 11.3 m3/min	Up to 100 m3/h



	TURBO BLOWER	ROOT BLOWER
Voltage	1 Phase (220 V) 3 Phase (220/380V)	3 Phase (220/380V)
Power	0.2 - 15KW	0.5 - 400 KW
Airflow	Up to 90m3/min	Up to 280 m3/min



	Inverter
Voltage	1 Phase (220 V) 3 Phase (220/380V)
Power	1.5 - 3 KW

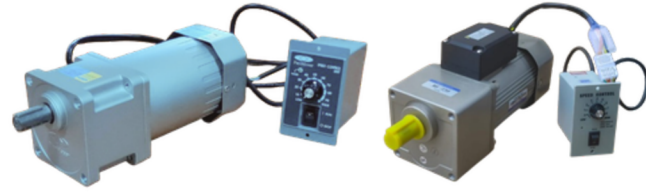

	INDUCTION MOTOR	VARIABLE SPEED MOTOR
Voltage	1 Phase (220V) 3 Phase (220/380V)	1 Phase (220V)
Power	6 - 200 Watt	
RPM	1500 RPM	
Gearbox Ratio	1:3 - 1:180	




Clutch Brake

Variable Speed Pulley

Pe-ei Miter

	ELECTRIC HOIST
Voltage	1 Phase (220 V) 3 Phase (220/380V)
Power	1.5 - 3 KW
Capacity	1 - 10 ton
Lifting Height	Up to 12 m

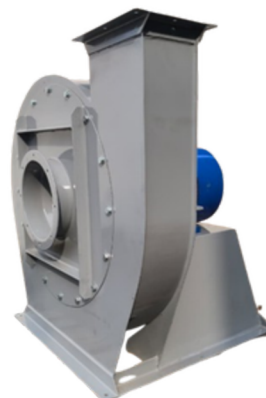

Centrifugal Blower



Koplign FCL